


MAGNATHERM® HTD

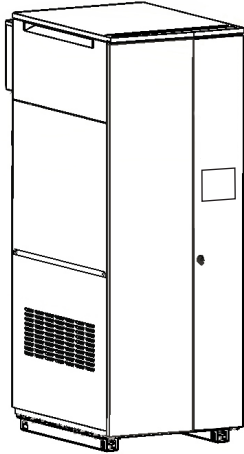

Hydronic Boiler

MGH | Hydronic Boiler

Indoor / Outdoor, Sizes 1600 - 4000

Submittal Data



Date:

Project #:

Engineer:

Prepared By:

Bid Date:

Project Name:

Location:

Contractor:

Standard Features

- ASME "H" stamp
- 160 psi maximum working pressure
- Certified for Category II and Category IV vent systems
- Indoor / Outdoor
- Low NOx system exceeds the most stringent regulations for air quality - 9ppm NOx
- High condensing efficiency
- Modulation down to 5% of full fire (20:1 turndown)
- Sophisticated gas/air valve allows for constant control of modulation
- Tru Trac™ real-time O₂ sensing maintains efficiency throughout the modulation range
- Sealed combustion chamber
- Pre-mix stainless steel burner
- Stainless steel heat exchanger with welded construction
- Electronic PID modulating control with large touchscreen and color display
- Multiple independent heat demands
- VARI-PRIME boiler pump control with fixed delta T control for variable flow through boiler
- Controller cascades with up to eight MagnaTherm boilers equipped with Laars Linc control
- Accepts 4-20ma or 0-10VDC external modulation or external set point control
- Modbus RTU & BACnet MSTP on board
- Multiple pump control for boiler pump, system pump, and indirect domestic water pump, each with delay
- Indirect water heater priority
- Sensor for indirect DHW tank
- Outdoor reset with air sensor
- Horizontal or vertical direct vent
- Vent and air pipe lengths of up to 100 equivalent feet (each)
- "Knock-down" feature: Removable top section for easy handling and installation
- High and low gas pressure switches
- Vent temperature cutoff
- Normally open alarm contact
- Air filter
- Built-in condensate trap
- Water flow switch
- Temperature & pressure gauge
- Low water cutoff
- 75 psi (517kPa) ASME rated pressure relief valve
- Groove lock fittings (optional flange adapter)
- Burner site glass
- 10-Year limited warranty

Boiler Data

Number of Units

Fuel

Natural

Voltage

120V, single ph (1600-2000)

208V, single ph (1600-2000)

220/240V, single ph (1600-2000)

208V, three ph (2000-4000)

480V, three ph (2000-4000)

600V, three ph (2000-4000)

Factory Mounted Options

ASME CSD-1

BACnet IP gateway

LonWorks gateway

Additional auto & manual reset high limit switches

Alarm bell with silence switch

Groove lock to flange connections

75 psi pressure relief valve (std)

30 psi pressure relief valve

50 psi pressure relief valve

60 psi pressure relief valve

125 psi pressure relief valve

150 psi pressure relief valve



Accessories for Field Mounting

- Gateway for BACnet IP
- Gateway for LonWorks
- Condensate neutralizer
- Condensate neutralizer with pump
- Vent terminal for outdoor unit
- Screen for outdoor unit air
- Vent terminal for horizontal stainless steel vent
- Screen for vertical stainless steel vent
- Screen for horizontal CPVC vent
- Screen for vertical CPVC vent
- Screen for horizontal polypropylene vent
- Screen for vertical polypropylene vent
- Screen/adaptor for vertical or horizontal PCV ducted air
- Screen for horizontal galvanized or vertical ducted air
- Screen for horizontal polypropylene ducted air
- Screen for vertical polypropylene ducted air

Sizing Data

	Model	Minimum Input Rate		Maximum Input Rate		Minimum Output Rate		Maximum Output Rate		Thermal Efficiency	Combustion Efficiency
		MBH	kw	MBH	kw	MBH	kw	MBH	kw	%	%
<input type="checkbox"/>	1600	80	23.4	1600	469	76	22.3	1520	445	95	96.0
<input type="checkbox"/>	2000	100	29.3	1999	586	95	27.8	1895	555	95	93.6
<input type="checkbox"/>	2500	125	36.6	2499	732	119	34.9	2374	696	95	93.8
<input type="checkbox"/>	3000	150	44.0	3000	879	141	41.3	2814	825	95	93.8
<input type="checkbox"/>	3500	175	51.3	3500	1025	164	48.1	3276	960	95	93.6
<input type="checkbox"/>	4000	200	58.6	4000	1172	190	55.7	3800	1113	95	93.1

	Model	Product Weight		Operating Weight		Shipping Weight		Water Content	
		lbs	kg	lbs	kg	lbs	kg	gal	l
	1600	1410	640	1582	718	1610	731	22	83
	2000	1410	640	1582	718	1610	731	22	83
	2500	1810	822	2064	937	2010	913	31	117
	3000	1810	822	2064	937	2010	913	31	117
	3500	2325	1056	2789	1266	2525	1146	56	212
	4000	2325	1056	2789	1266	2525	1146	56	212

Clearances

	Clearance to Combustibles		Suggested Service Clearance		Suggested Top Service Clearance by Model					
	inches	cm	inches	cm	1600/2000		2500/3000		3500/4000	
Front	18	46	24	61	inches	cm	inches	cm	inches	cm
Back	11	28	24	61	12	30	15	38	24	61
Left	4	10	8	20						
Right	4	10	8	20						
Top	1	2.5								

Electrical Data

Size	1600			2000					
	120	240/220	208 1Φ	120	240/220	208 1Φ	208 3Φ	480	600
FLA	6.2	3.4	3.6	18.6	10.1	12.5	7.5	3.5	4.4
MCA	7.8	4.2	4.5	23.3	12.7	15.6	9.4	4.4	5.5
MOP	20	15	15	30	25	25	15	15	15

Size	2500/3000			3500/4000		
	208 3Φ	480 3Φ	600 3Φ	208 3Φ	480	600
FLA	9.5	4.4	3	9.9	3.6	4.5
MCA	12	6	4	12	5	6
MOP	20	15	15	20	15	15

Full Load Amperage
Minimum Circuit Ampacity
Max Over-current Protection

Vent Information

Model	Vent / Air Connector Size		Air Pipe Size		Maximum Ducted Air Pipe Length		Category IV Vent Pipe Size		Maximum Category IV Vent Pipe Length		Typical Category II Vent Pipe Size***	
	inches	cm	inches	cm	ft**	m	inches	cm	ft**	m	inches	cm
1600	6	15	6	15	100	30.5	6	15	50	15.2	14	36
							8*	20*	100	30.5	14	36
2000	8	20	8	20	100	30.5	8	20	100	30.5	14	36
2500	8	20	8	20	100	30.5	8	20	50	15.2	18	46
							10*	25*	100	30.5	18	46
3000	10	25	10	25	100	30.5	10	25	100	30.5	18	46
3500	10	25	10	25	100	30.5	10	25	50	15.2	22	56
							12*	30*	100	30.5	22	56
4000	12	30	12	30	100	30.5	12	30	100	30.5	22	56

*A vent increaser at the boiler outlet is required

**Equivalent Feet: To calculate maximum equivalent length, measure the linear feet of the pipe and add 5 feet (1.5m) for each elbow used.

***Category II: Category II pipe size may vary. Draft must remain between -0.01 and -0.001" w.c..

Notes:

- Installations in the U.S. require exhaust vent pipe that is CPVC complying with ANSI/ASTM D1785 F441, stainless steel complying with UL1735, or polypropylene complying with ULC S636.
- Installations in Canada require exhaust vent pipe that is certified to ULC S636.
- Intake (air) pipe must be PVC or CPVC that complies with ANSI/ASTM D1785 F441, ABS that complies with ANSI/ASTM D1527, stainless steel, or galvanized material.

English

Water Flow Requirements

Size	Output Max Btu/hr	25°F		30°F		35°F		40°F	
		Flow GPM	Head Loss* Feet	Flow GPM	Head Loss* Feet	Flow GPM	Head Loss* Feet	Flow GPM	Head Loss* Feet
1600	1,504,000	122	19.4	100	14	87	10	76	8
2000	1,883,000	150	30	128	23.5	109	17.1	95	13.6
2500	2,374,000	190	34	158	23.6	136	17.6	119	13.6
3000	2,814,000	226	47	190	34.2	164	25.8	142	18.9
3500	3,276,000	266	41	222	30.6	190	23.6	166	18.6
4000	3,724,000	300	48	255	38.2	218	28.5	190	22.5

*Headloss is for boiler only (no piping)

Metric

Size	Output Max kW	14°C		17°C		19°C		22°C	
		Flow LPM	Head Loss* m	Flow LPM	Head Loss* m	Flow LPM	Head Loss* m	Flow LPM	Head Loss* m
1600	441	461.8	5.9	378.5	4.3	329.3	3.0	287.7	2.4
2000	552	567.8	9.1	484.5	7.2	412.6	5.2	359.6	4.1
2500	696	719.2	10.4	598.1	7.2	514.8	5.4	450.5	4.1
3000	825	855.5	14.3	719.2	10.4	620.8	7.9	537.5	5.8
3500	960	1006.9	12.5	840.4	9.3	719.2	7.2	628.4	5.7
4000	1,091	1135.6	14.6	965.3	11.6	825.2	8.7	719.2	6.9

*Headloss is for boiler only (no piping)

Min Allowable Flow Rates

Size	Output Min BTU/Hr	Flow* GPM	Flow* LPM	Output Min K/W
1600	80,000	8	30	23.5
2000	100,000	11	42	29.5
2500	125,000	13	49	36.7
3000	150,000	16	61	44
3500	175,000	18	68	51.3
4000	200,000	21	79	58.7

*To operate at these minimum flow rates, the flow switch may need to be adjusted or replaced

Dimensional Data

Model	A	B	C	D	E	G	H	J
1600	29.3 (75)	79.8 (203)	38.0 (96)	57.5 (147)	49.8 (126)	60.8 (154)	2.6 (7)	8.4 (21)
2000	29.3 (75)	79.8 (203)	38.0 (96)	57.5 (147)	49.8 (126)	60.8 (154)	2.6 (7)	8.4 (21)
2500	30.8 (78)	87.0 (221)	41.5 (105)	60.5 (154)	60.8 (154)	71.0 (180)	4.0 (10)	9.8 (25)
3000	30.8 (78)	87.0 (221)	41.5 (105)	60.5 (154)	60.8 (154)	71.0 (180)	4.0 (10)	9.8 (25)
3500	34.5 (88)	97.5 (248)	52.0 (133)	70.0 (178)	60.8 (154)	81.3 (207)	7.0 (18)	8.3 (21)
4000	34.5 (88)	97.5 (248)	52.0 (133)	70.0 (178)	60.8 (154)	81.3 (207)	7.0 (18)	8.3 (21)

inches (cm)

Model	K	N	P	Q	R	S	T	U
1600	67.4 (171)	30.4 (77)	16.0 (41)	23.0 (58)	10.2 (26)	14.0 (36)	13.0 (33)	6.3 (16)
2000	67.4 (171)	30.4 (77)	16.0 (41)	23.0 (58)	10.2 (26)	14.0 (36)	13.0 (33)	6.3 (16)
2500	76.4 (194)	34.5 (88)	17.7 (45)	27.2 (69)	11.8 (30)	18.3 (46)	14.8 (38)	6.0 (15)
3000	76.8 (195)	34.5 (88)	17.7 (45)	27.2 (69)	11.8 (30)	18.3 (46)	14.8 (38)	6.0 (15)
3500	86.4 (219)	40.0 (102)	21.6 (55)	30.7 (78)	13.0 (33)	16.0 (41)	17.4 (44)	6.7 (17)
4000	86.4 (219)	40.0 (102)	21.6 (55)	30.7 (78)	13.0 (33)	16.0 (41)	17.4 (44)	6.7 (17)


inches (cm)

Model	*Vent Collar Diameter	*Air Inlet Collar Diameter	'Knockdown' Height	Water Connection
1600	6 (15)	6 (15)	60.8 (154)	3" groove lock (opt. flange)
2000	8 (20)	8 (20)	60.8 (154)	3" groove lock (opt. flange)
2500	8 (20)	8 (20)	70.1 (180)	3" groove lock (opt. flange)
3000	10 (25)	10 (25)	70.1 (180)	3" groove lock (opt. flange)
3500	10 (25)	10 (25)	80.8 (205)	4" groove lock (opt. flange)
4000	12 (30)	12 (30)	80.8 (205)	4" groove lock (opt. flange)

* Collar dimension only.
Refer to section 1.G for vent and air pipe sizes.

inches (cm)

MAGNATHERM® HTD

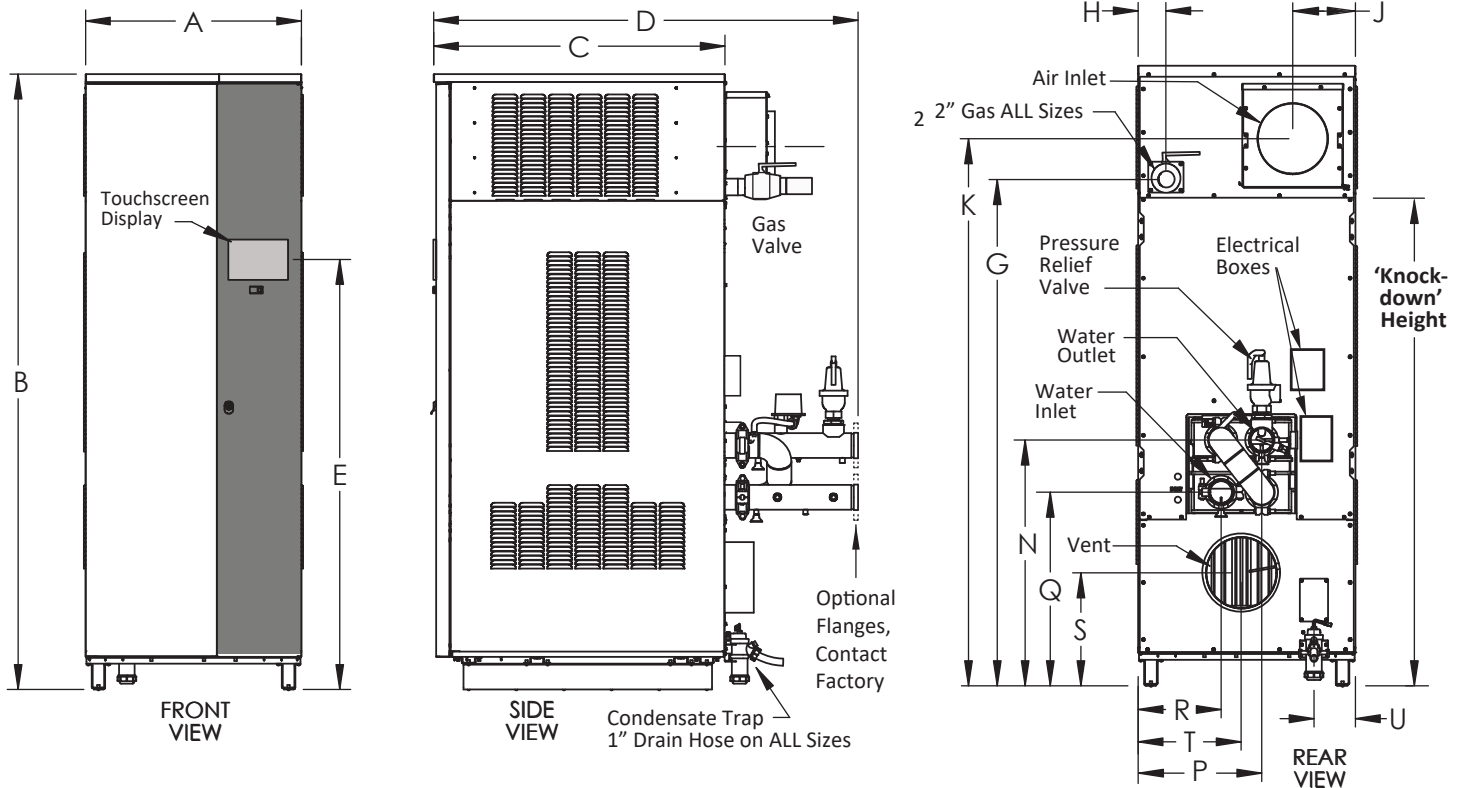

Laars Heating Systems Company reserves the right to change specifications, components, features, or to discontinue products without notice.